

插装式电磁控制溢流阀 (LBS)

Solenoid Controlled Relief Logic Valves

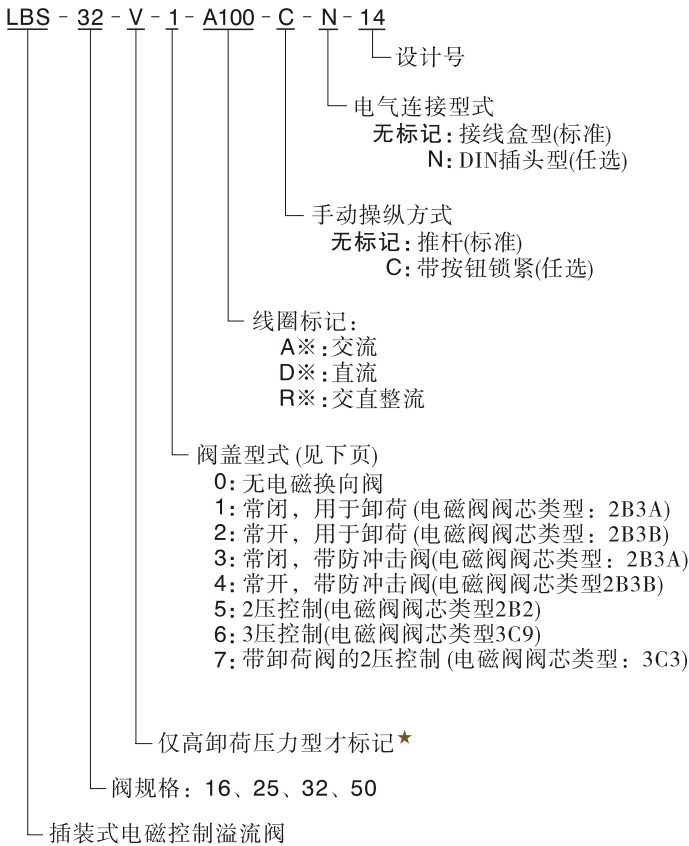
为了插装式溢流阀的遥控回路无配管化，由电磁换向阀、先导式溢流阀和防冲击阀等组成的组合式阀。电磁换向阀用作控制油路的选择，使泵卸荷，或靠先导式溢流阀对液压系统进行2个或3个压力控制。

参 数

型号	最 高 工作压力 MPa	压 力 调节范围 MPa	最大流量 L/min	质量 kg
LBS-16-※-※-※-14	31.5	0.4~31.5	125	8.8
LBS-25-※-※-※-14			250	9.7
LBS-32-※-※-※-14			500	11.9
LBS-50-※-※-※-14			1200	21.3









型号说明





★高卸荷压力型是为缩短卸荷到加载的过渡时间而选用。



■ 类型表 (LBS)

类 型 (盖板型式标记)	液压图形符号	阀规格							
		16	25	32	40	50	63	80	100
不带电磁阀 (0)		○	○	○	—	○	—	—	—
常闭卸荷 (1)		○	○	○	—	○	—	—	—
常开卸荷 (2)		○	○	○	—	○	—	—	—
常闭带防冲击阀 (3)		○	○	○	—	○	—	—	—
常开带防冲击阀 (4)		○	○	○	—	○	—	—	—
2压控制 (5)		○	○	○	—	○	—	—	—

类 型 (盖板型式标记)	液压图形符号	阀规格							
		16	25	32	40	50	63	80	100
3压控制 (6)		○	○	○	—	○	—	—	—
带卸荷的2压控制 (7)		○	○	○	—	○	—	—	—